

COMPLETE DESIGNATION	XM200	Z	T4/2	-	B	+	102
MODEL							
MATERIAL (X = AISI 304 - Z = AISI 316)							
VOLTAGE TRI 50Hz (T2 = 230V - T4 = 400V)							
VELOCITY (/2 = 2 vel. - VF = adjustable vel.)							
ELECTRICAL PANEL (Look at specifications) (0 = without electrical panel)							
OPTIONS (Look at available options)							

ARGENTA XM200

20,000 l/h

PISTONS	1		
SUMP	Helical gears in oil bath		
INVERTER	Ball flow-reverser with self-adjusting floating packings		
TRANSMISSION	V-belt		
INLET-OUTLET	45R(W.54x9,5/1") - 40RM(M.55x3) - 50R(W.66x8/1") - 50RM(M.67x3) - 60RM - 40NW - 50NW - 45RI		
ELECTRICAL CONNECTION	10 meters hose cable 2,5mm 3+T and 16A plug IP-44 3P+T		
MAX. PRESSURE bar	2.5	2.5	2.5
FLOW m ³ /h.	20/10	20/10	de 3 a 20
POWER kW	3.4/2.7	3.4/2.7	3
WEIGHT KG.	190	193	198

MAIN FEATURES:

- Modular design easily removable for inspection and cleaning.
- Stainless steel trolley with two fixed wheels and two revolving, with break.
- Safety pressure-switch.
- Drain valves in each chamber of body pump assembly.



2 VELOCITIES ELECTRIC UNITS "B"	2 VEL. ELECTRONIC EQUIPMENT + RC STOP/START/VELOCITY/INVERTER	ADJUSTABLE VELOCITY
B	D+107	A

_T4/2	TRI 400V 50Hz 2 vel.	*	*
_T4VF	TRI 400V 50Hz adjustable vel.		*

XM200 options

* Available options when ordering



2 VELOCITIES ELECTRIC UNITS "B"	2 VEL. ELECTRONIC EQUIPMENT + RC STOP/START/VELOCITY/INVERTER	ADJUSTABLE VELOCITY
B	D+107	A

			2 VELOCITIES ELECTRIC UNITS "B"	2 VEL. ELECTRONIC EQUIPMENT + RC STOP/START/VELOCITY/INVERTER	ADJUSTABLE VELOCITY
	_T4/2	TRI 400V 50Hz 2 vel.	*	*	
	_T4VF	TRI 400V 50Hz adjustable vel.			*
ADDITIONAL OPTIONS	101	RC stop/start Long-range radio remote control, start/stop. (Transmitter in waterproof case)		*	*
	107	RC stop/start-velocity Long-range radio remote control, with start/stop-velocity controls. (IP-66 transmitter)			INCLUDED
	102	RC stop/start/velocity/inverter Alike 107 + motorized spheric inverter.			*
	110	Autom. stop/start by pressure Allows to automatically start the pump after a stop by overpressure. Start/stop the pump when opening/closing a tap in one end of the hose.		*	*
	111	Connection for external manoeuvre Start/stop for open/close contact.		*	*
	145	Without plug Supplied with 10 meters power cable without plug.		*	*

ARGENTA electrical panels specifications

“A” Adjustable velocity

Waterproof IP-55 electronic variator with switch disconnecter, speed control, inverter and full engine protection.

Electronic pressure-switch to avoid over-pressures.

When maximum flow is required, the inverter automatically adjusts speed in order to get the best performance possible, without over-pressures, taking into account differences in height, diameter and length of pipes, etc.



“B” 2 velocities

IP-55 stainless steel electrical box with clutch switch disconnecter, velocity switcher and full engine protection.

Pressure-switch to avoid over-pressures.





“D+107” Electronic 2 velocities + RC

IP-55 stainless steel electrical box with clutch switch disconnecter, contactors and buttons for velocity selection (smooth transition between velocities), full engine protection.

Long-range radio remote control (stop/start/velocity).
IP-66 transmitter.

Pressure-switch to avoid over-pressures.

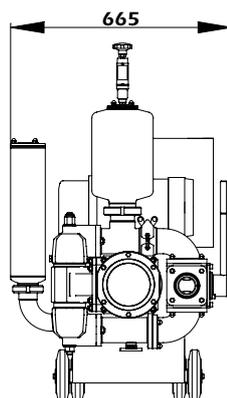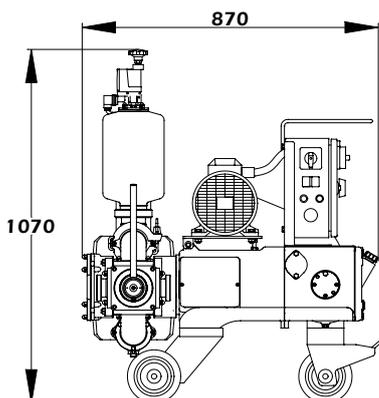

Look for images of your pump configuration in www.deloule.com

Les cotes, els rendiments i les altres dades indicades, igual que les imatges, són orientatives.
Ens reservem el dret d'efectuar qualsevol modificació de les característiques, materials o aspecte de les nostres màquines.