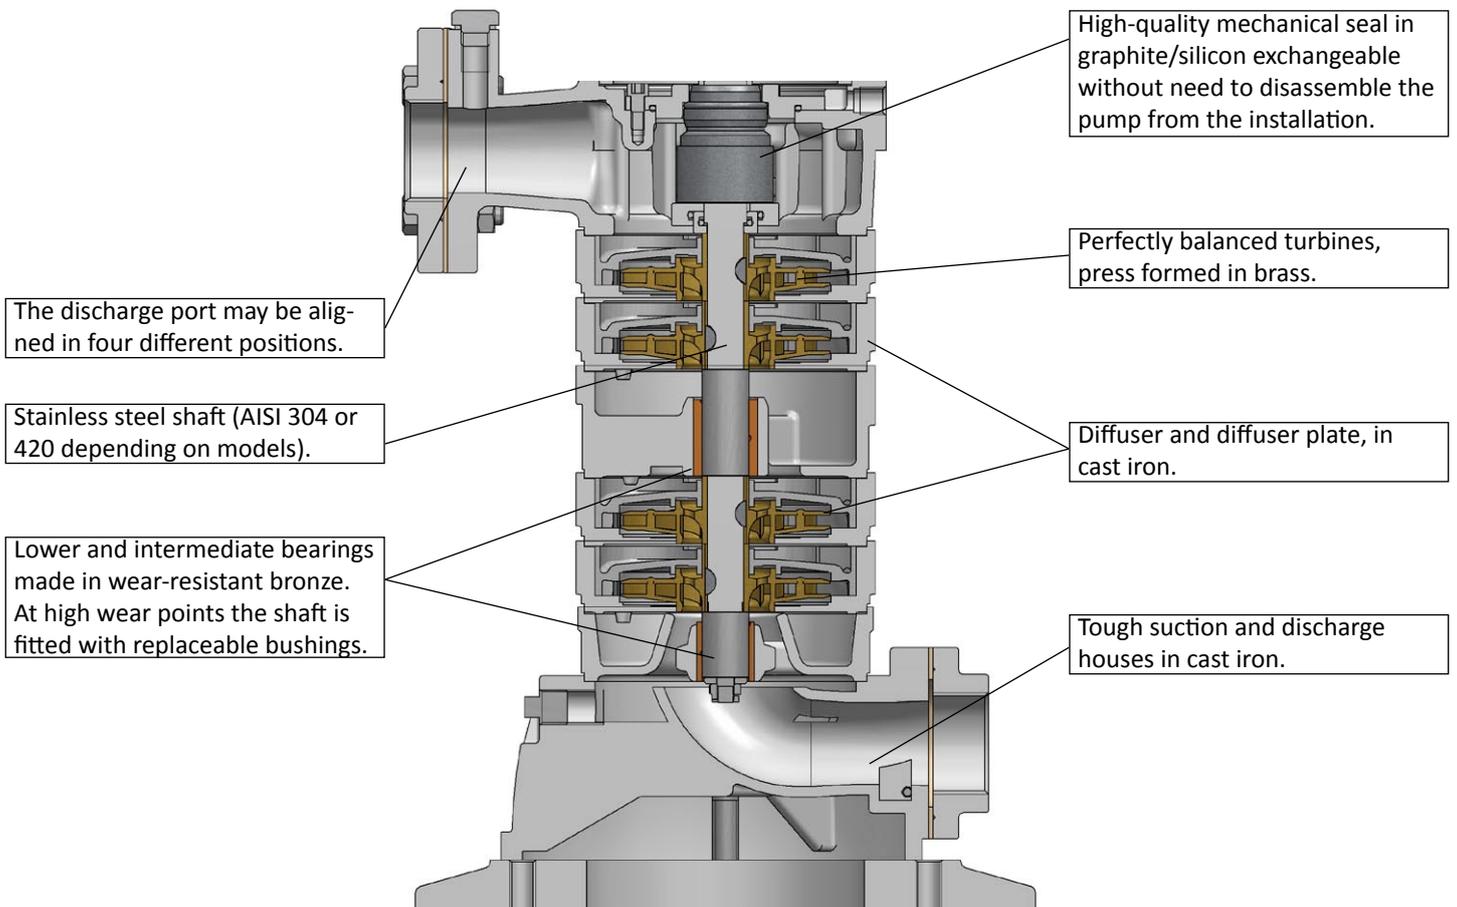
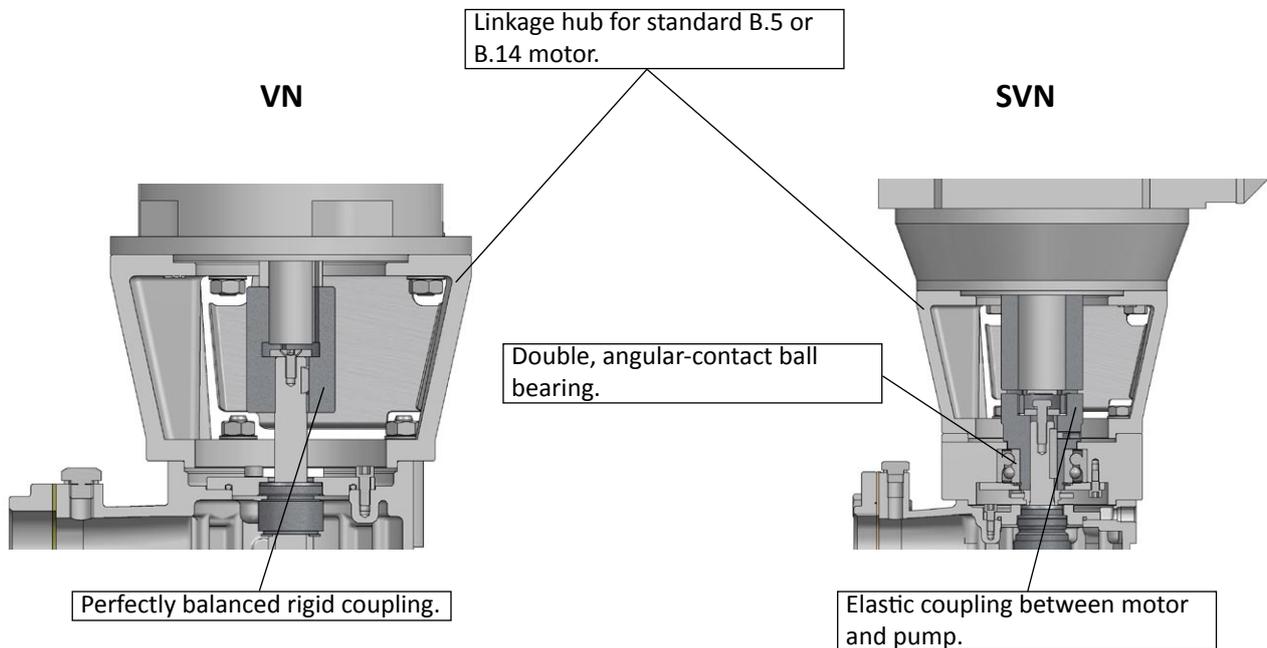



MULTIBARS 985.1 - 985.2 vertical multistage centrifugal pump 2,000 - 10,000 l/h - 2,850 rpm
985.__.__.VN semimonoblock pump with standard motor

985.__.__.SVN pumps with elastic coupling transmission and standard motor


MULTIBARS 985.1.VN-VNS - 985.2.VN-VNS

from 2,000 to 10,000 l/h

* Available options when ordering





	POWER kW.	AVAILABLE OPTIONS		SEMIMONOBLOCK ELECTROPUMP 50 Hz. (WITHOUT ELECTRIC UNIT) VN - VNS	MOTOR		
		SEALING SILIC/ SILIC/ NBR			SIZE	FLANGE	SHAFT DIAMETER
985.1.4.VN	0.75	*		*	80	B5 D.200	19
985.1.5.VN	1.1	*		*	80	B5 D.200	19
985.1.6.VN	1.1	*		*	80	B5 D.200	19

985.2.3.VN	1.1	*		*	80	B5 D.200	19
985.2.3.VNS	1.1	*		*	80	B5 D.200	19
985.2.4.VN	1.5	*		*	80	B5 D.200	24
985.2.4.VNS	1.5	*		*	80	B5 D.200	24
985.2.5.VN	2.2	*		*	90	B5 D.200	24
985.2.6.VN	2.2	*		*	90	B5 D.200	24

"VNS" = Pumps with same discharge port position as 985.SV (For substitutions without changing installation)

985.1.4-1.5-1.6-2.5 and 2.6 discharge port position is the same in versions "V", "SV" and "VN"

Electropumps up to 2.2 kW available with 230V monophasic motor

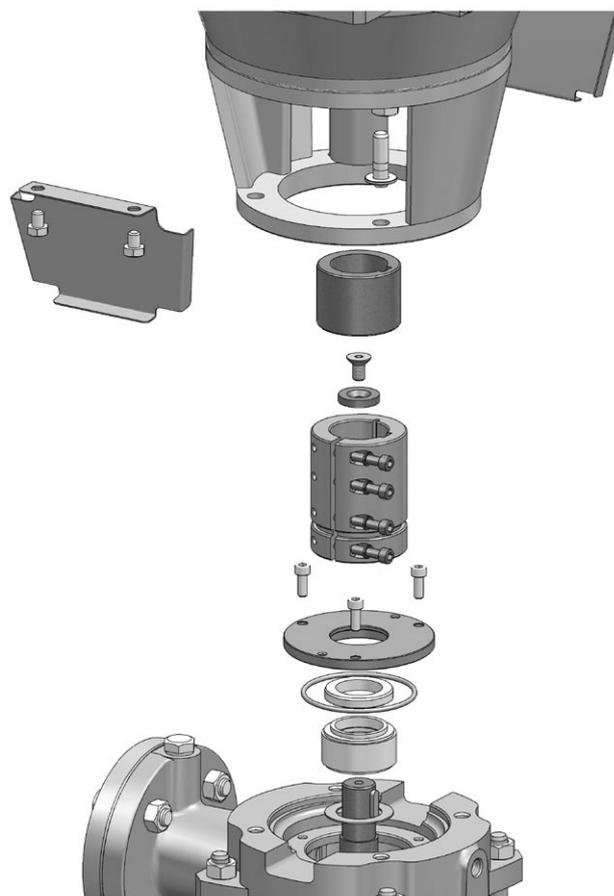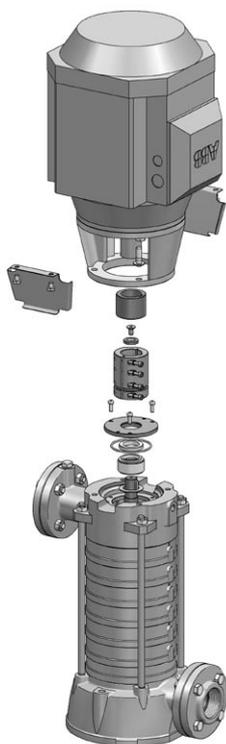


**Inspection or replacement of the mechanical seal
without disassembling the pump from the installation**

MULTIBARS 985.1.SVN - 985.2.SVN

from 2,000 to 10,000 l/h


* Available options when ordering



	POWER	AVAILABLE OPTIONS			ELECTROP. WITH ELASTIC COUPLING 50 Hz. (WITHOUT ELECTRIC UNITS)	PUMP WITHOUT MOTOR WITH ELASTIC COUPLING	MOTOR		
		SEALING SILIC/ SILIC/ NBR	SEALING SILIC/ SILIC/ EPDM				SIZE	FLANGE	SHAFT DIAMETER
	kW.	116	127		SVN	SVN		mm	mm
985.1.8.SVN	1.5	*			*	*	90	B5 D.200	24
985.1.10.SVN	2.2	*			*	*	90	B5 D.200	24
985.1.12.SVN	2.2	*			*	*	90	B5 D.200	24
985.1.16.SVN	3		*		*	*	100	B5 D.250	28
985.1.20.SVN	4		*		*	*	112	B5 D.250	28
985.1.25.SVN	5.5		*		*	*	132	B14 D.200	38
985.2.8.SVN	3	*			*	*	100	B5 D.250	28
985.2.11.SVN	4	*			*	*	112	B5 D.250	28
985.2.15.SVN	5.5		*		*	*	132	B14 D.200	38
985.2.20.SVN	7.5		*		*	*	132	B14 D.200	38
985.2.25.SVN	9.2		*		*	*	132	B14 D.200	38


Electropumps up to 2.2 kW also available with 230V monophasic motor




Electropumps from 4 kW available with 400/690V motor


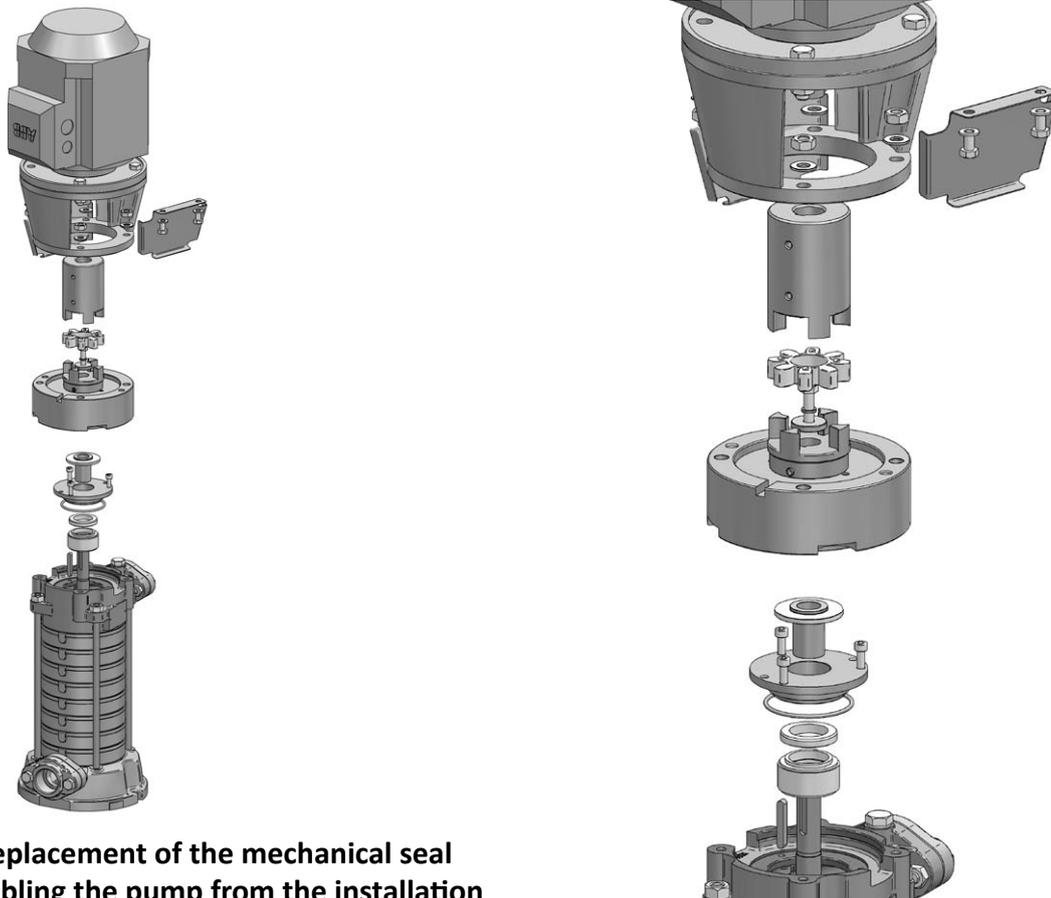

Inspection or replacement of the mechanical seal without disassembling the pump from the installation




MULTIBARS 985 2,850 rpm

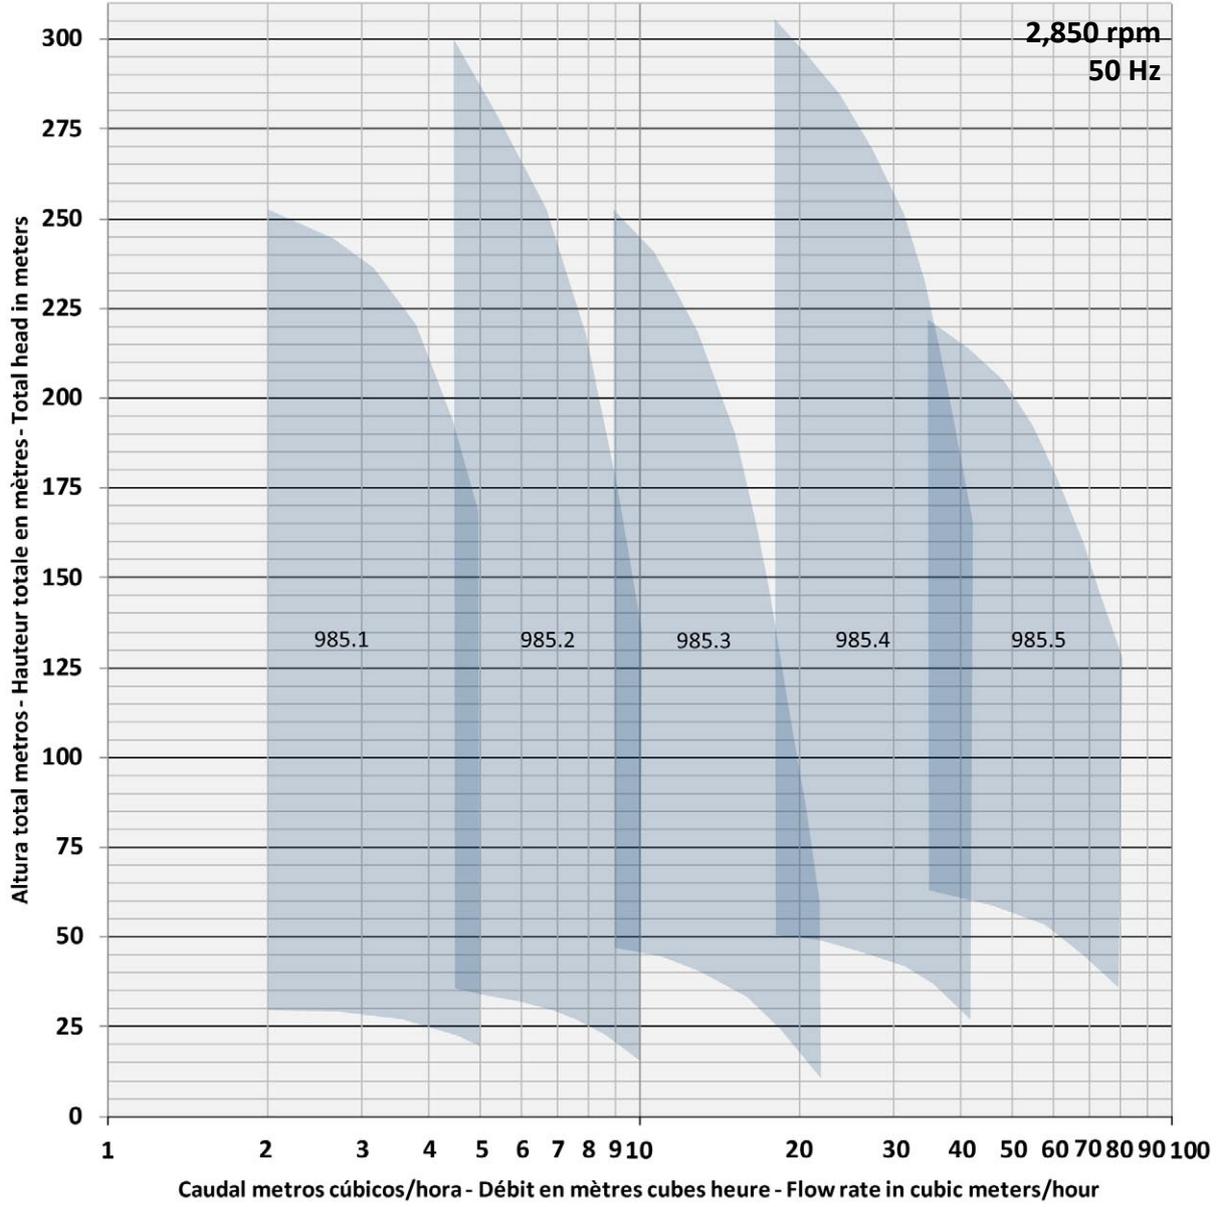

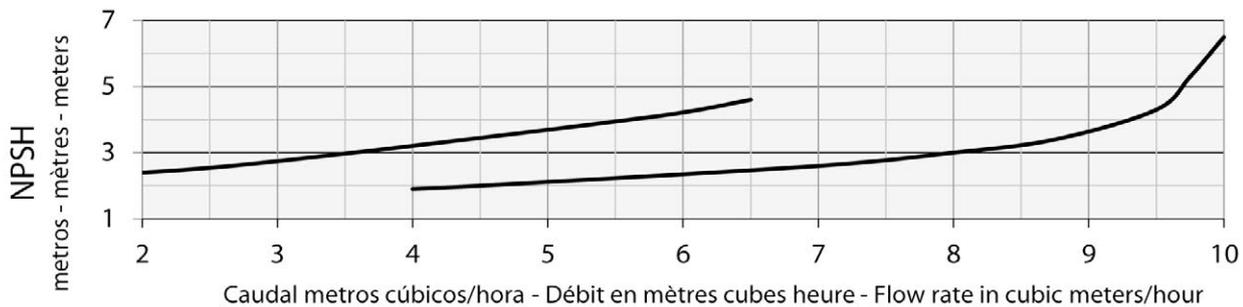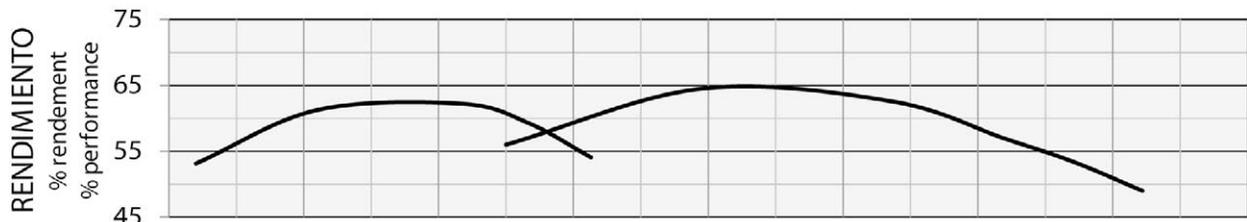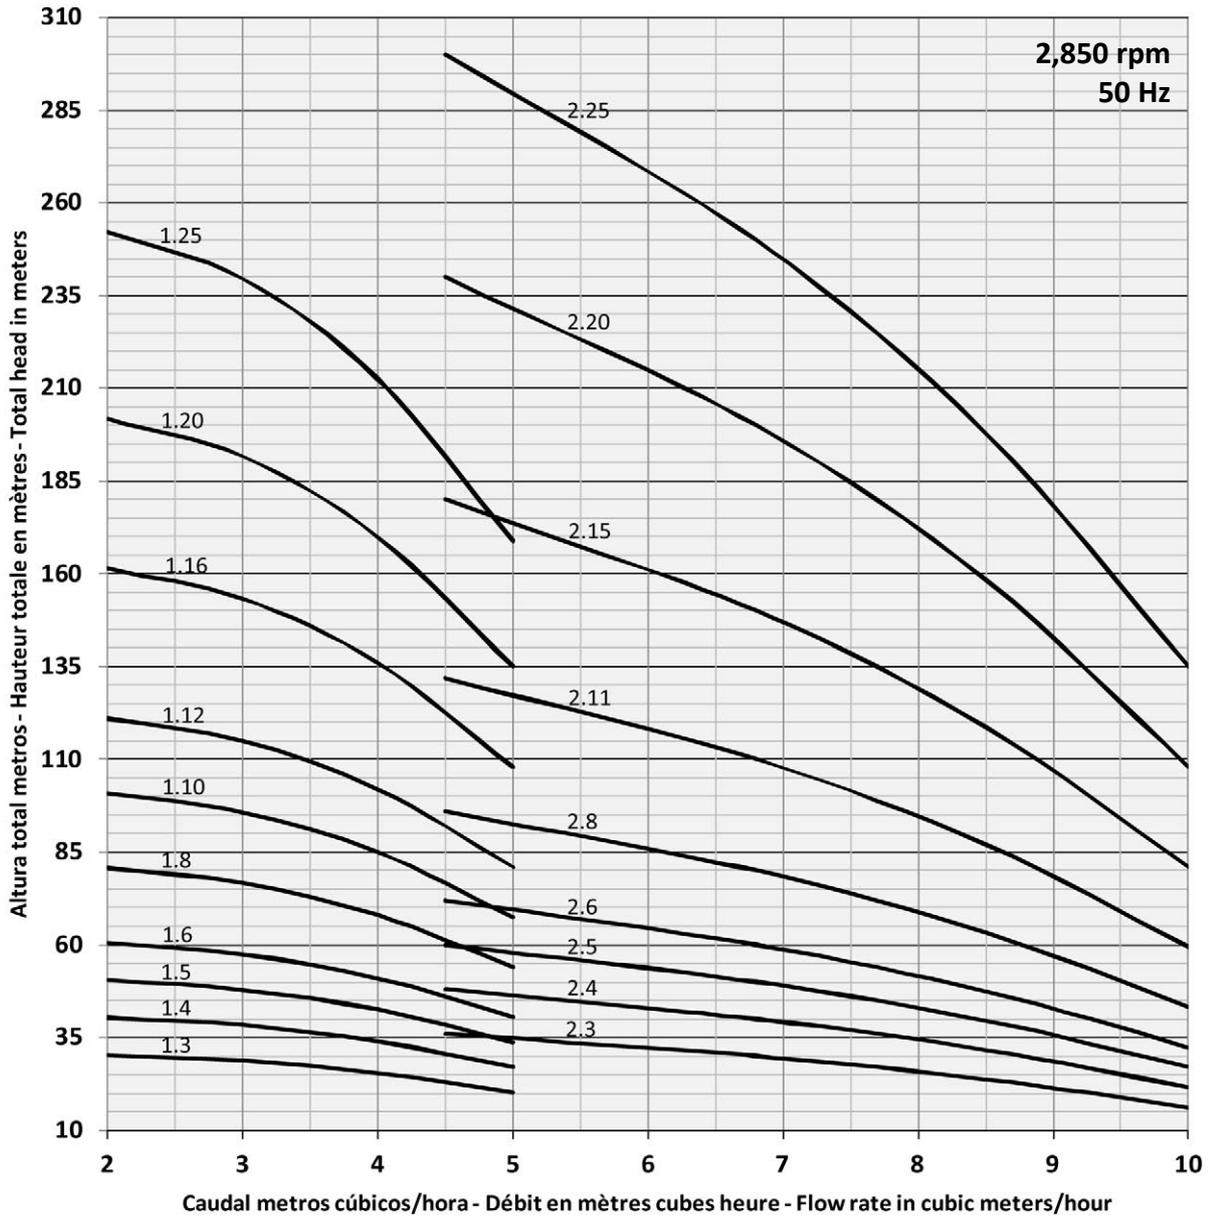
MULTIBARS 985.1 and 985.2 2,850 rpm

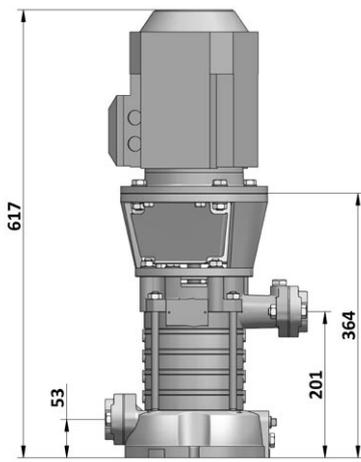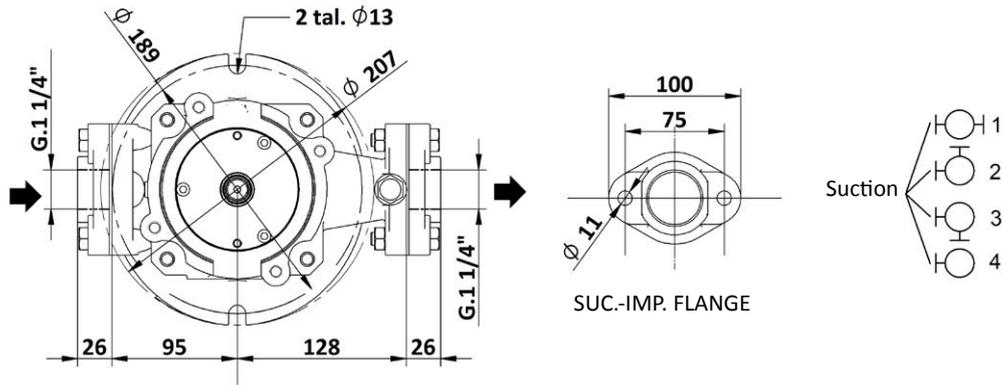
MULTIBARS 985.1.VN dimensions


985.1.4.VN

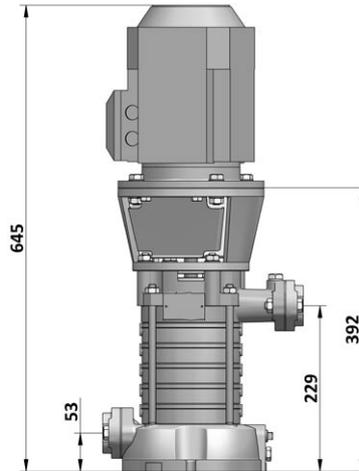


985.1.5.VN

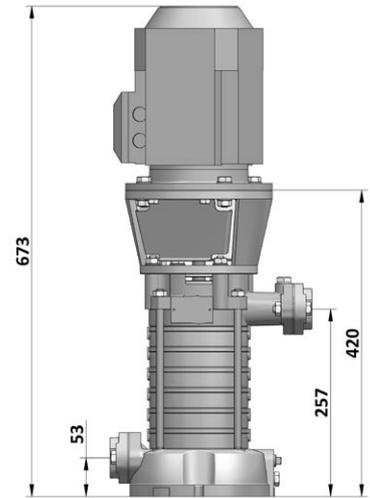




985.1.6.VN

985.1.VN: discharge port in the same position as 985.1.V

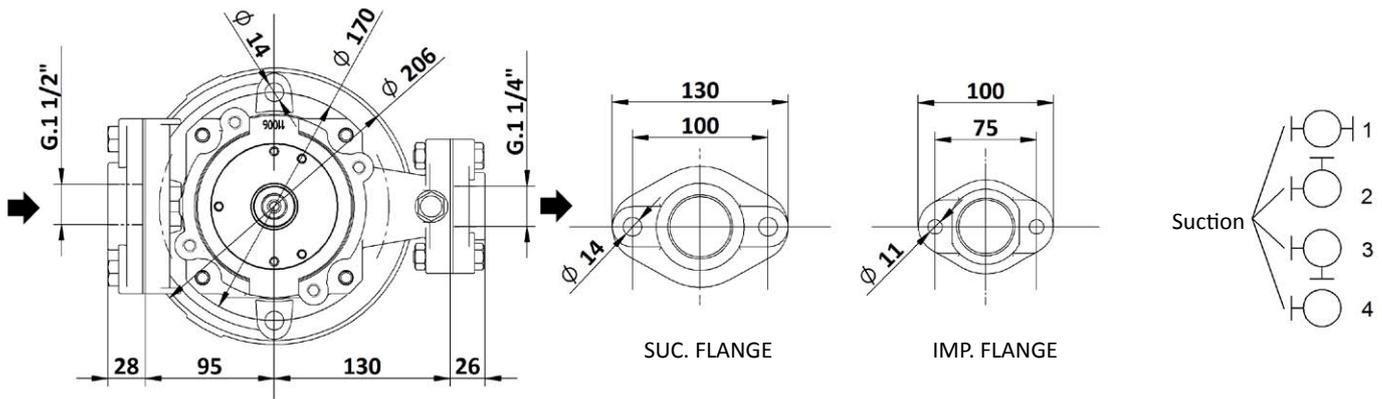
MULTIBARS 985.2.VN-VNS dimensions


"VNS" = Pumps with the same discharge port position as 985.SV
 For substitutions without changing installation

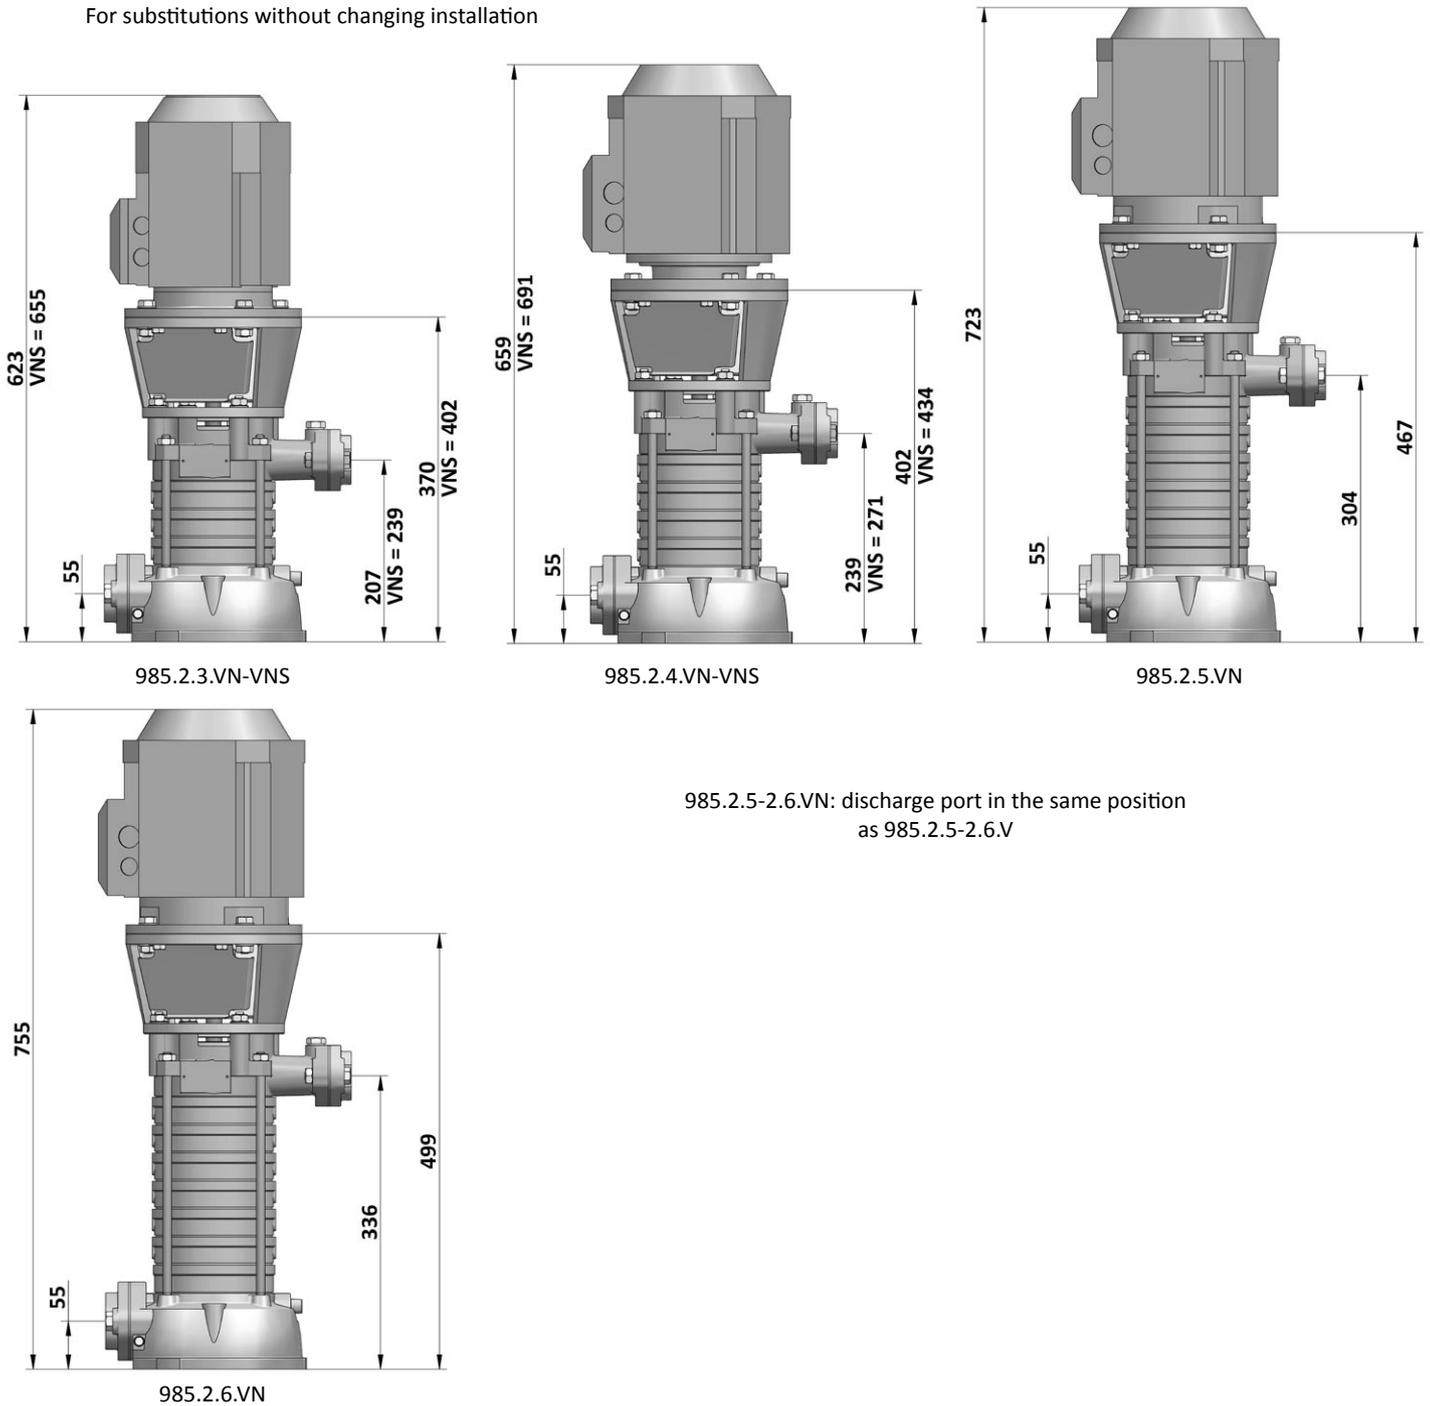


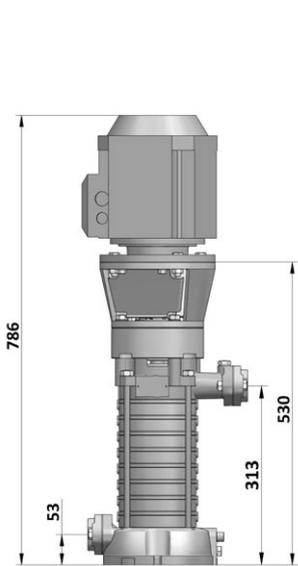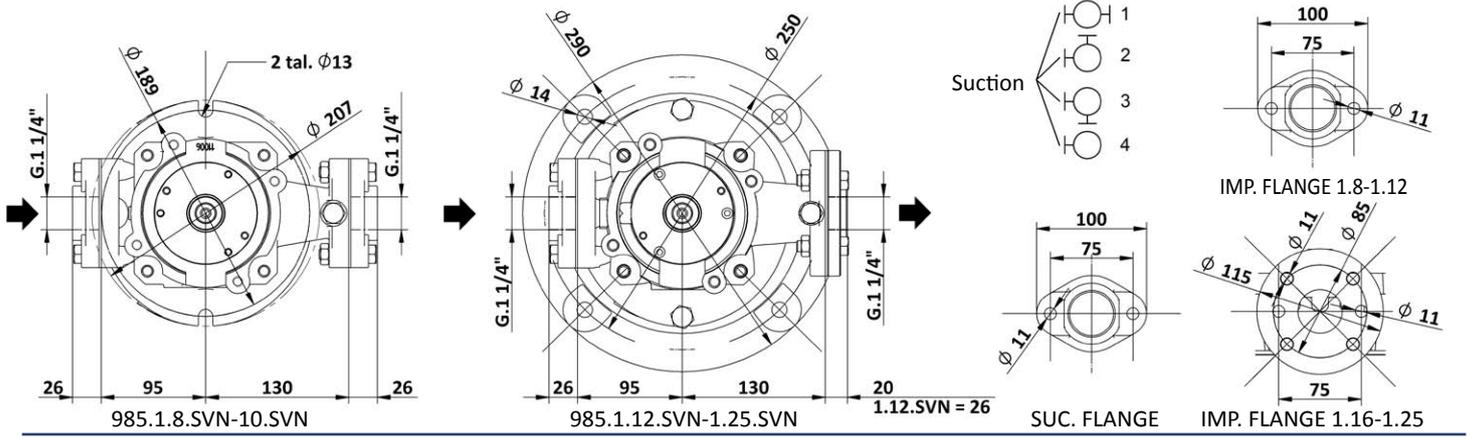MULTIBARS 985.1.SVN dimensions


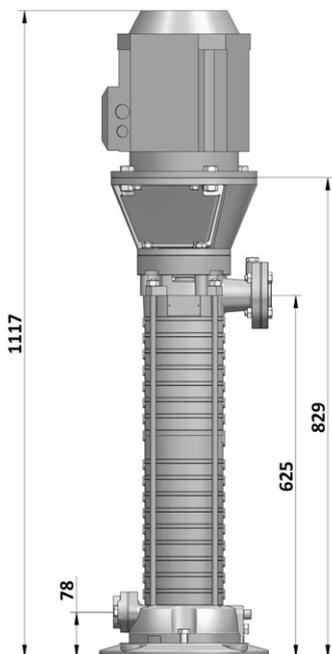
985.1.8.SVN

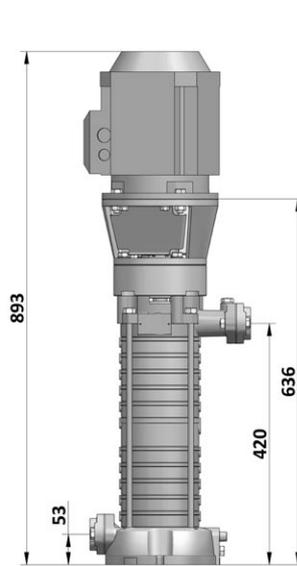


985.1.10.SVN

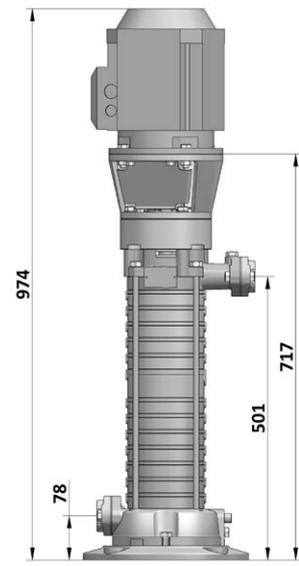


985.1.12.SVN





985.1.16.SVN

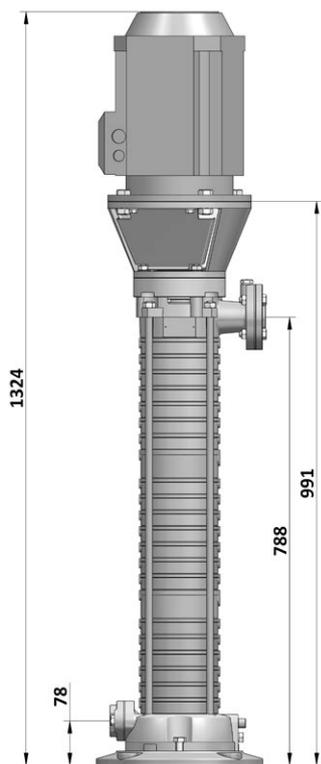


985.1.20.SVN

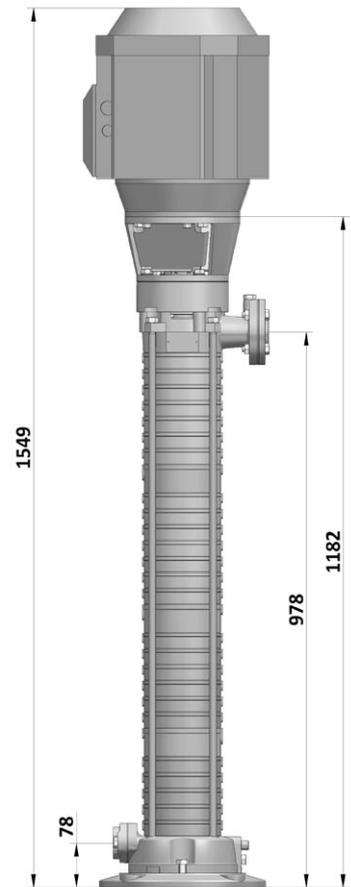


985.1.25.SVN

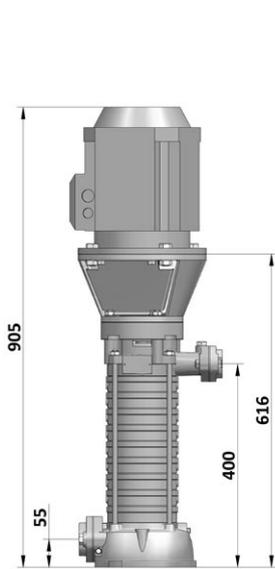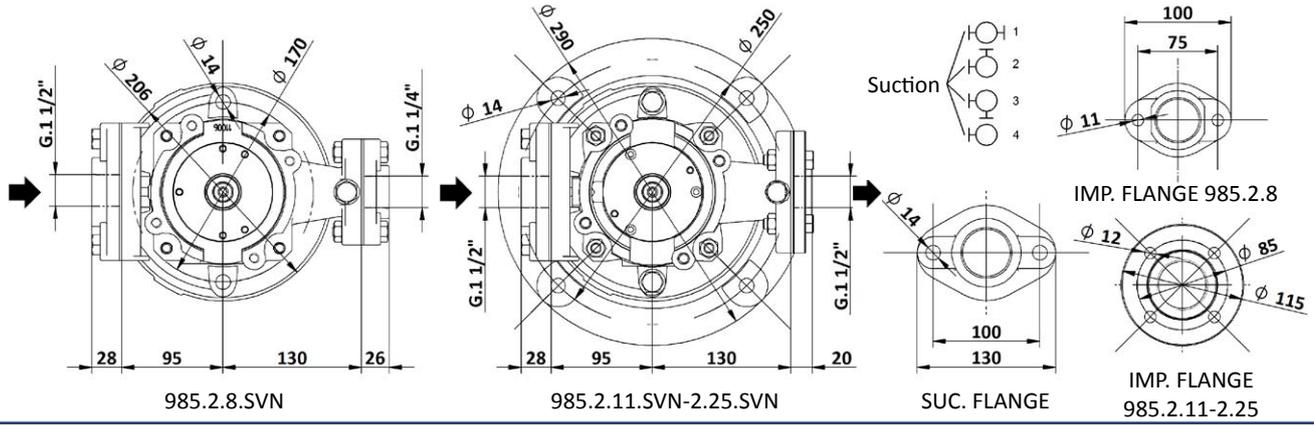MULTIBARS 985.2.SVN dimensions


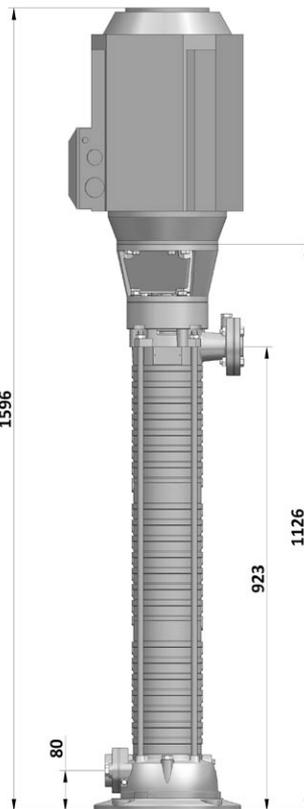
985.2.8.SVN

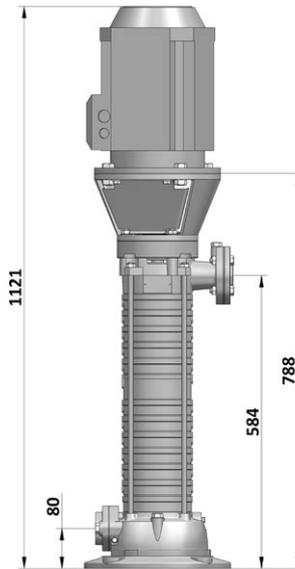


985.2.11.SVN

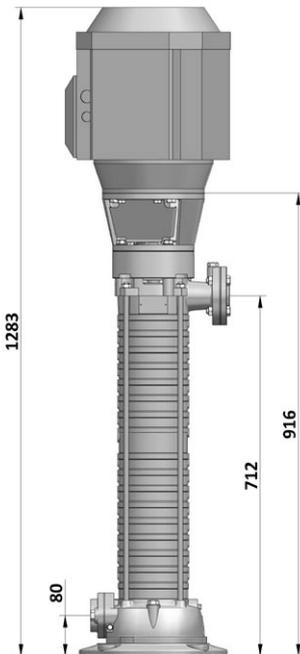

985.2.15.SVN



985.2.20.SVN

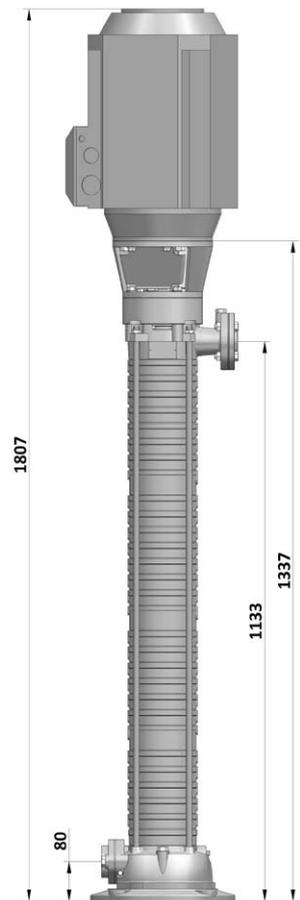

985.2.25.SVN

Dimensions, performance rates and other details given in this catalogue, as also the photographs, are just a guidance.
We reserve the right to make any change of specifications, materials or appearance of our units.