

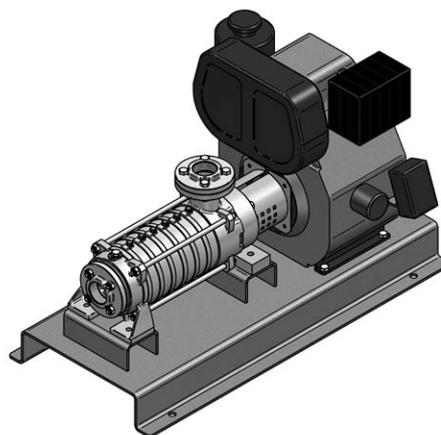
COMPLETE DESIGNATION	985.3.6	/116	/3LD510	AE	+	135
MODEL						
DIAMETER IMPELLER (/116 = 116 mm.)						
MOTOR						
STARTING (AE = electric starting, except for the battery and wiring - AR = recoverable starting - AER = electr+recoveral emer. starting)						
OPTIONS (Look at available options)						

985.3/ multicellular centrifugal motopump with Lombardini 3LD diesel engine with elastic coupling

PUMP BODY	Cast iron
TURBINES	Perfectly balanced. In cast iron and available in bronze
DIFFUSERS AND DIFFUSER PLATES	In cast iron and available in bronze
SEALING	High-quality mechanical seal in graphite/silicon/NBR
MOUNTING	On bench with elastic coupling
INLET-OUTLET	SUC G.2" - IMP G.2"
MOTOR POWER (NB) kW/HP	7,3/10
STANDARD FUEL TANK	5,3 liters
RECOMENDED BATTERY	12V - 44 Ah
MOTOPUMP WEIGHT KG.	140
PUMP WEIGHT KG.	42


MAIN FEATURES:

Extremely sturdy construction.






STATIONARY MOTOR PUMP ELECTRIC STARTING, EXCEPT FOR BATTERY AND WIRING

		510AE
116/3LD/		*
ADD. OPTIONS	116 Mechanical sealing in silicon/silicon/NBR	*
	128 Cells in bronze (Turbine, diffuser and diffusor plate)	*
	134 Stop electromagnet	*
	135 Security box kit (Shuts down the engine for missing oil pressure or temperature)	*

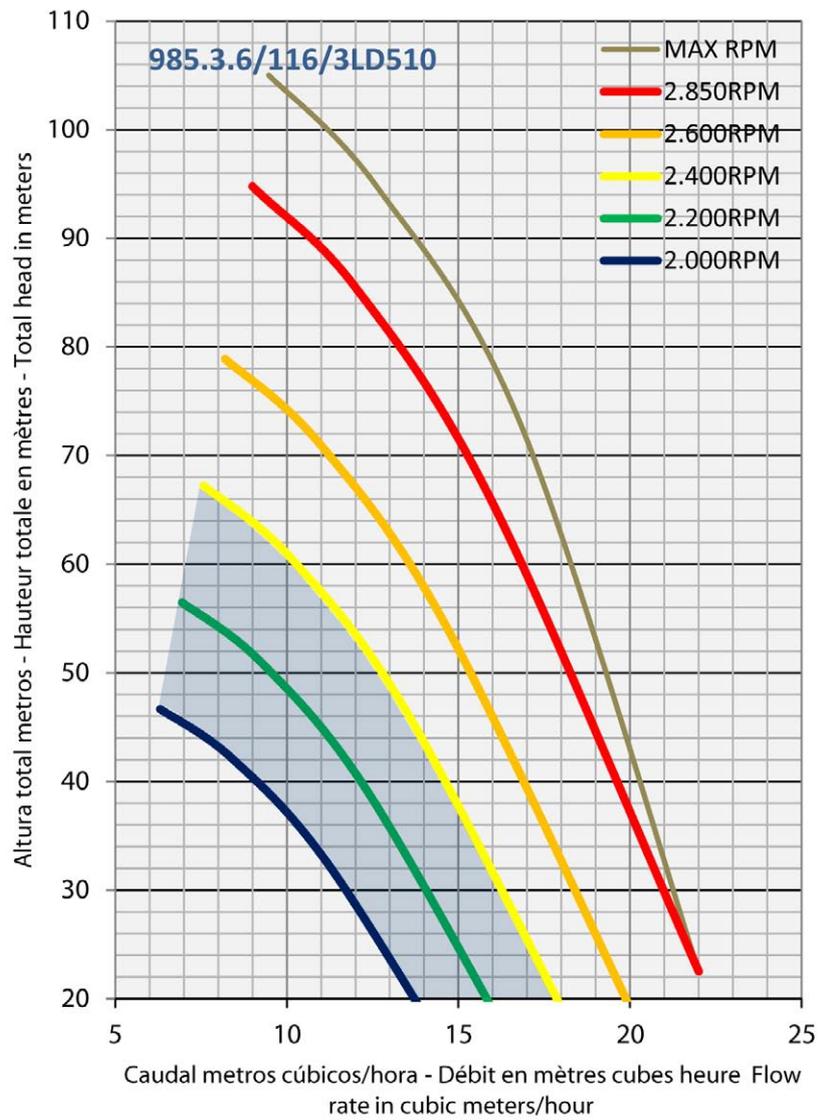

 **Recomended working zone for intensive uses**

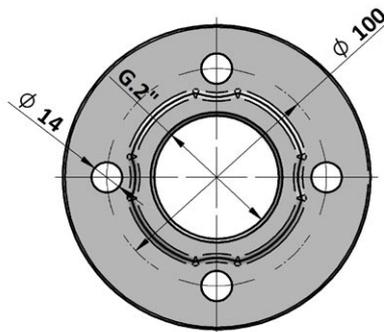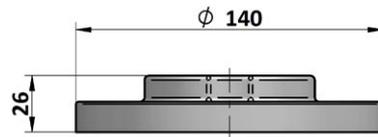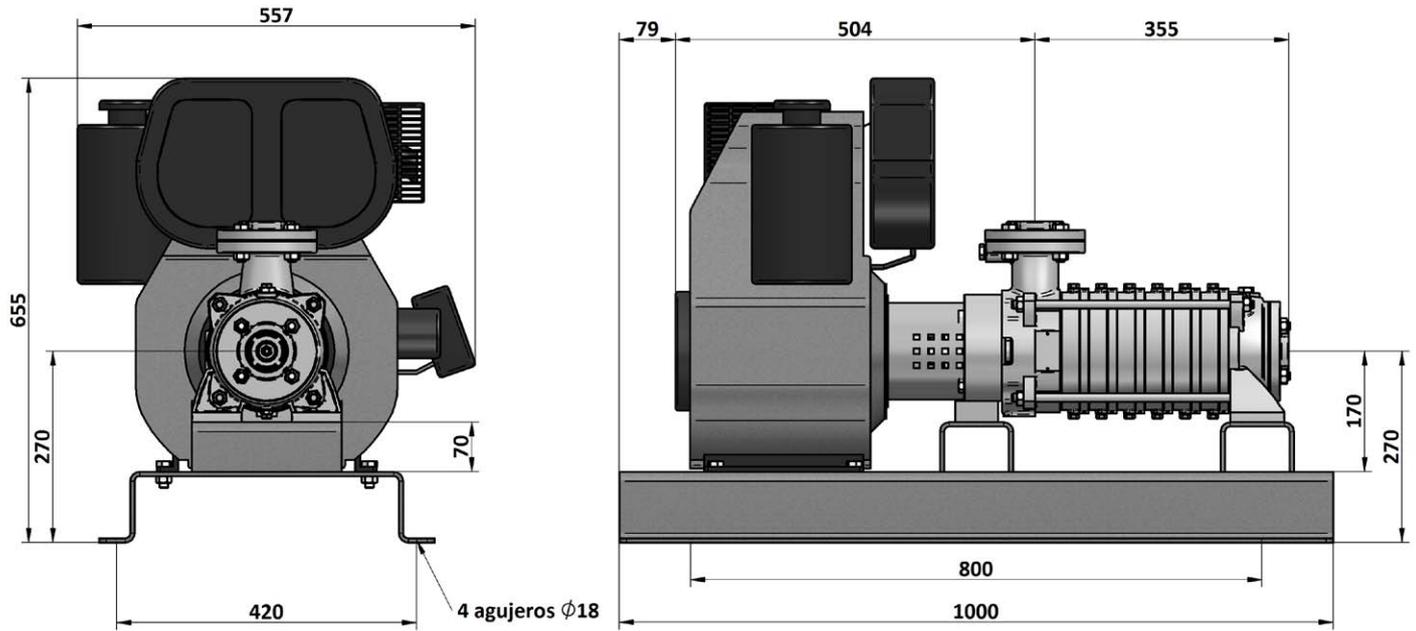DIESEL 985.3.6/116/3LD dimensions


SUC. - IMP. FLANGE