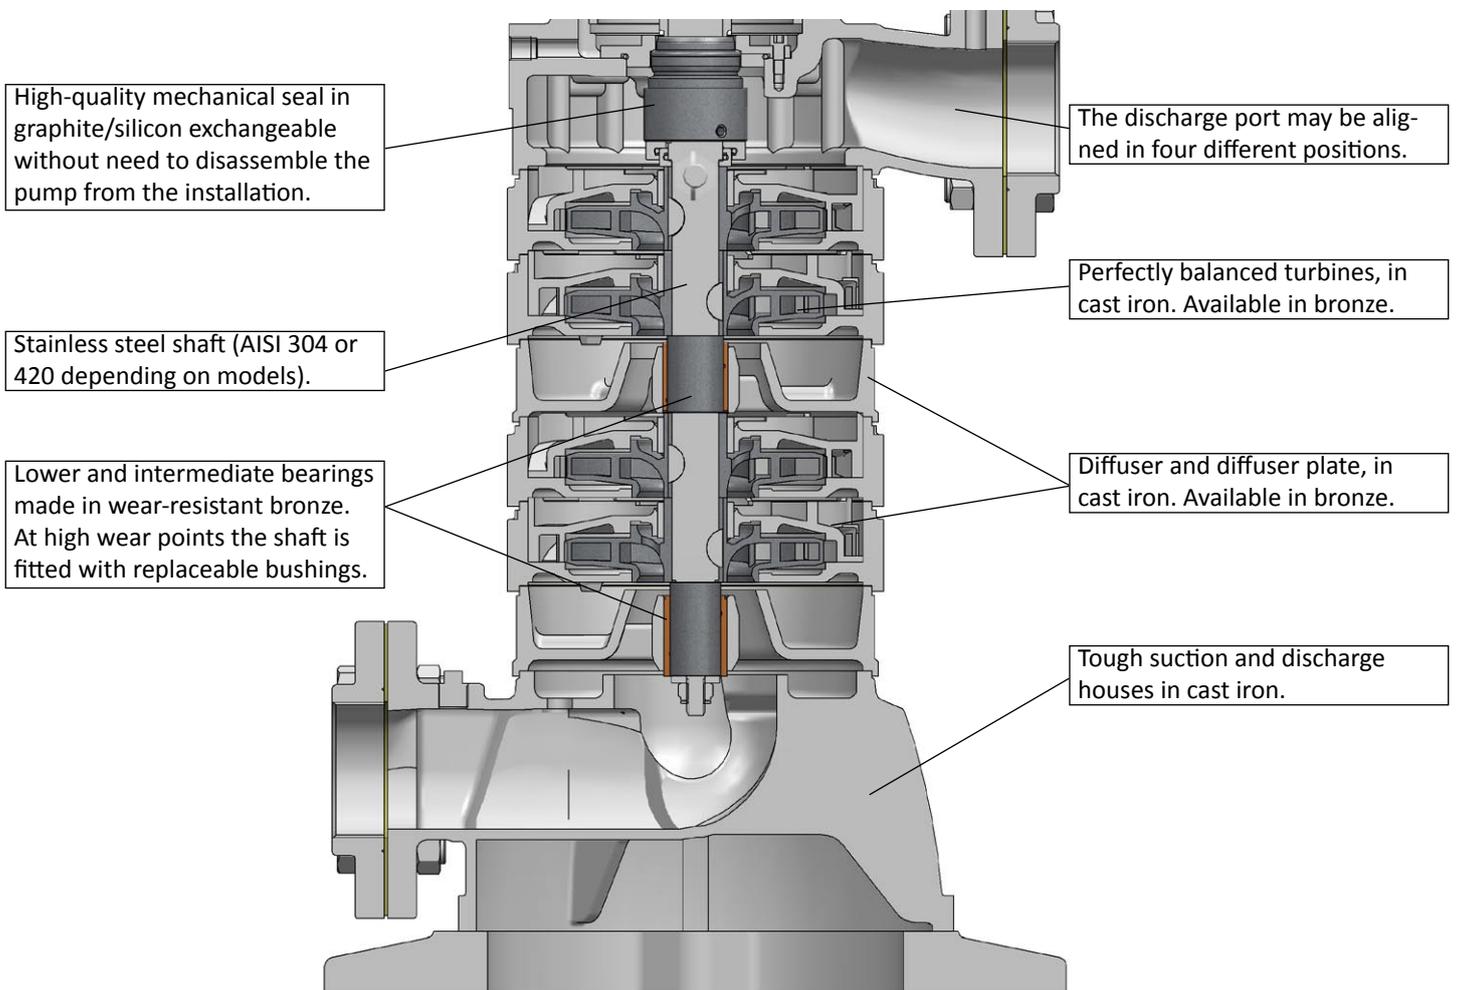
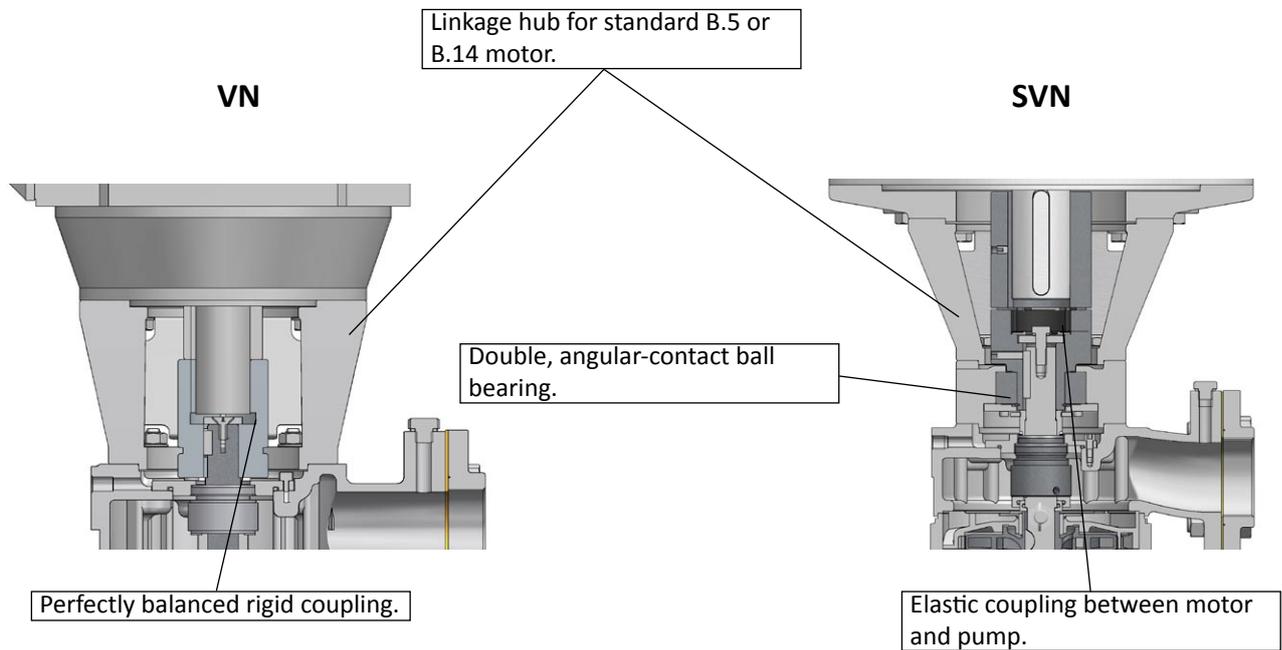


MULTIBARS 985.3 - 985.4 vertical multistage centrifugal pump 9,000 - 42,000 l/h - 2,850 rpm

985.__.__.VN semimonoblock pump with standard motor

985.__.__.SVN pumps with elastic coupling transmission and standard motor



MULTIBARS 985.3.VN-VNS - 985.4.VN-VNS

from 9,000 to 42,000 l/h

* Available options when ordering

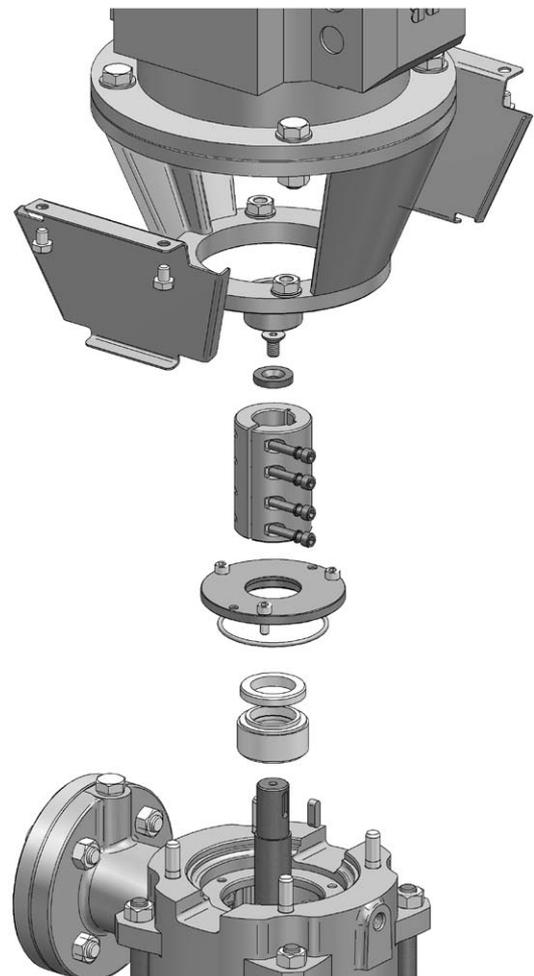


	POWER	AVAILABLE OPTIONS			SEMIMONOBLOCK ELECTROPUMP 50 Hz. (WITHOUT ELECTRIC UNIT)	MOTOR		
		SEALING SILIC/ SILIC/ NBR	CELLS IN BRONZE			SIZE	FLANGE	SHAFT DIAMETER
		kW.	116	128		VN - VNS	mm	mm
985.3.3.VN	3	*	*	*	100	B5 D.250	28	
985.3.3.VNS	3	*	*	*	100	B5 D.250	28	
985.3.4.VN	4	*	*	*	112	B5 D.250	28	
985.3.4.VNS	4	*	*	*	112	B5 D.250	28	
985.3.5.VN	5.5	*	*	*	132	B14 D.200	38	
985.3.6.VN	5.5	*	*	*	132	B14 D.200	38	
985.4.2.VN	5.5	*	*	*	132	B14 D.200	38	
985.4.2.VNS	5.5	*	*	*	132	B14 D.200	38	

"VNS" = Pumps with same discharge port position as 985.SV (For substitutions without changing installation)

985.3.5 and 3.6 discharge port position is the same in versions "V", "SV" and "VN"


Electropumps from 4 kW available with 400/690V motor


**Inspection or replacement of the mechanical seal
without disassembling the pump from the installation**

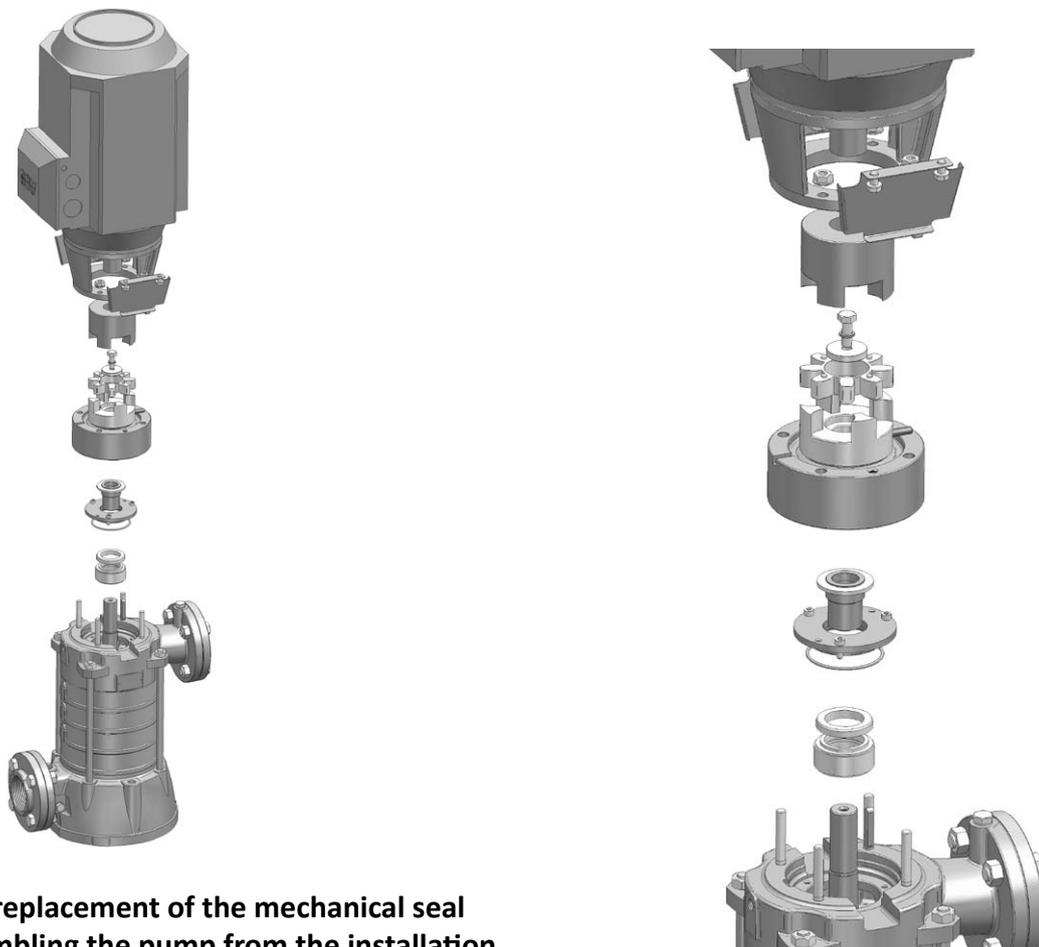
MULTIBARS 985.3.SVN - 985.4.SVN

from 9,000 to 42,000 l/h

* Available options when ordering



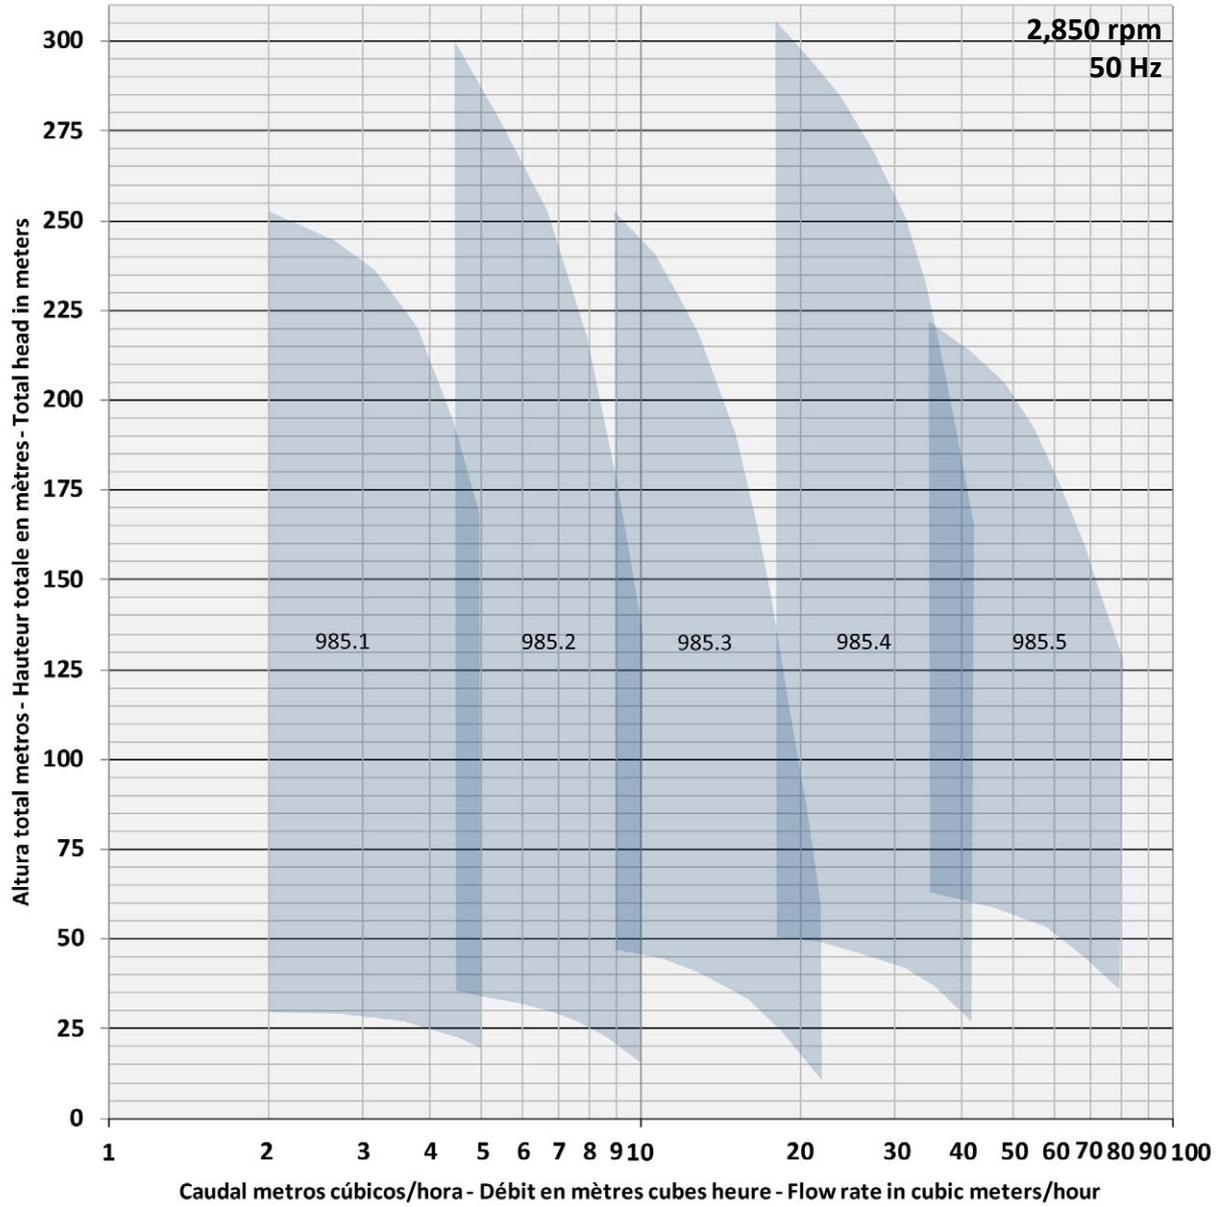
	POWER	AVAILABLE OPTIONS			ELECTROP. WITH ELASTIC COUPLING 50 Hz. (WITHOUT ELECTRIC UNIT)	PUMP WITHOUT MOTOR WITH ELASTIC COUPLING	MOTOR		
		SEALING SILIC/ SILIC/ NBR	SEALING SILIC/ SILIC/ EPDM	CELLS IN BRONZE			SIZE	FLANGE	SHAFT DIAMETER
		kW.	116	127			128	SVN	SVN
985.3.8.SVN	7.5	*		*	*	*	132	B14 D.200	38
985.3.10.SVN	9.2		*	*	*	*	132	B14 D.200	38
985.3.12.SVN	11		*	*	*	*	160	B5 D.350	42
985.3.16.SVN	15		*	*	*	*	160	B5 D.350	42
985.4.3.SVN	9.2	*		*	*	*	132	B14 D.200	28
985.4.4.SVN	11	*		*	*	*	160	B5 D.350	42
985.4.5.SVN	15	*		*	*	*	160	B5 D.350	42
985.4.6.SVN	18.5	*		*	*	*	160	B5 D.350	42
985.4.8.SVN	22		*	*	*	*	180	B5 D.350	48
985.4.10.SVN	30		*	*	*	*	200	B5 D.400	55
985.4.12.SVN	37		*	*	*	*	200	B5 D.400	55

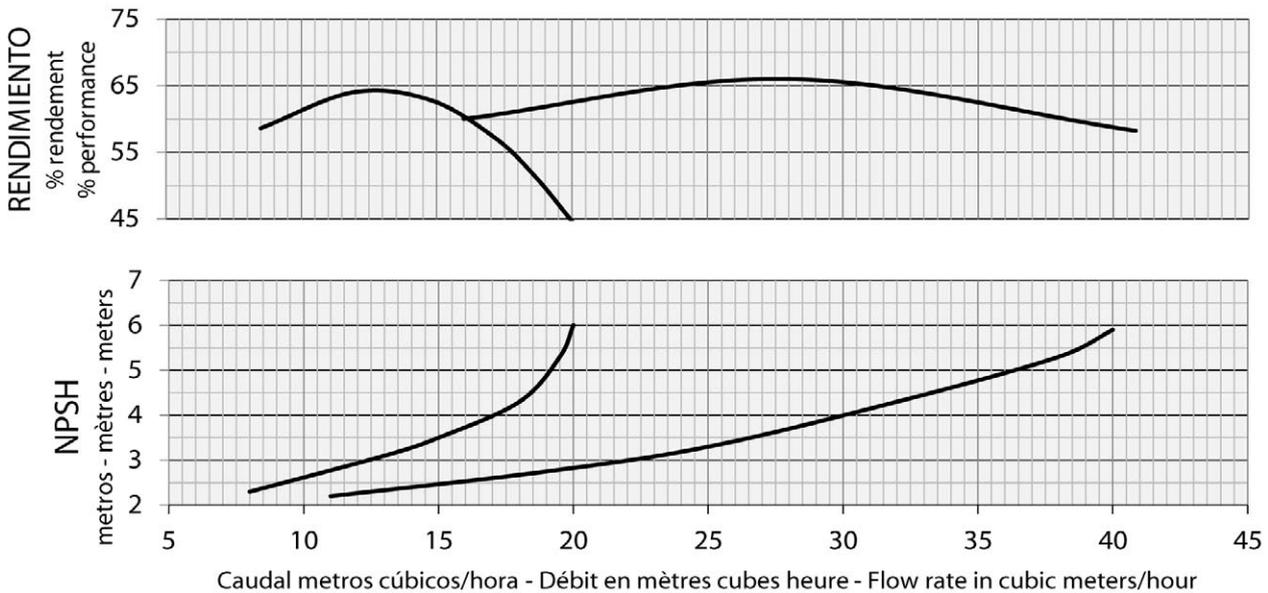
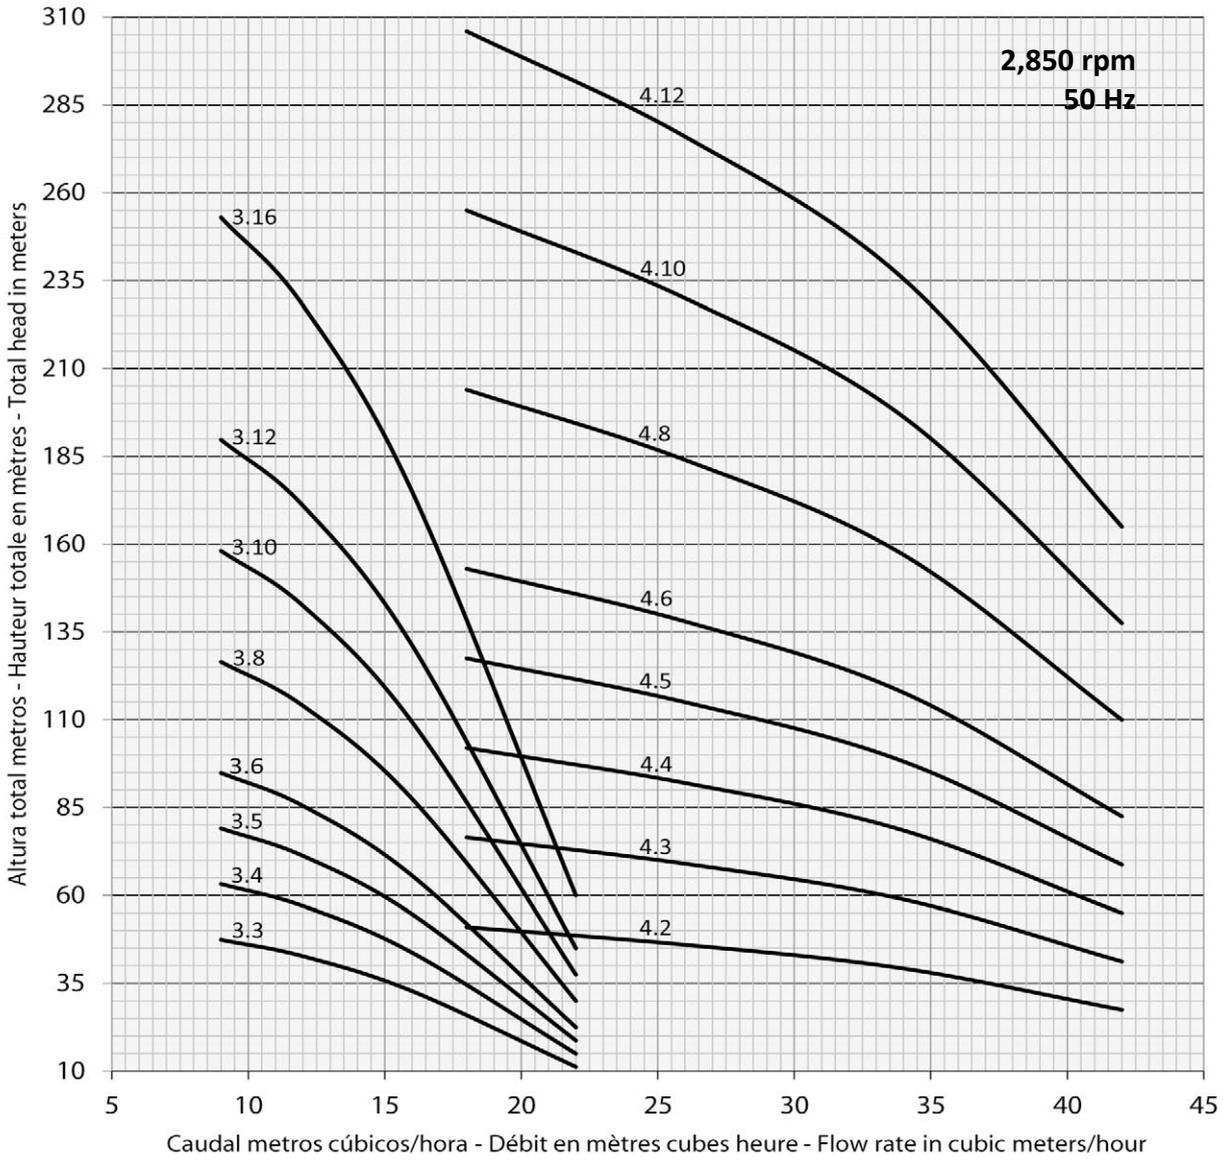


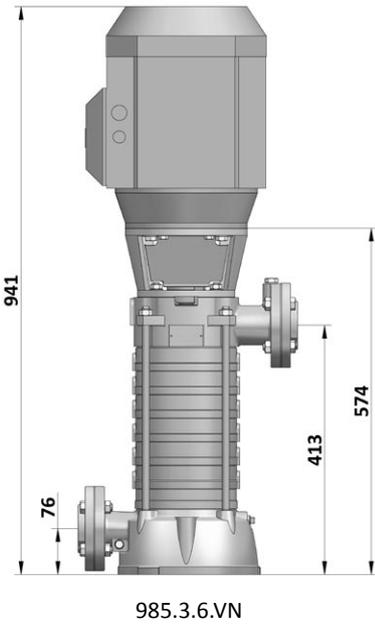
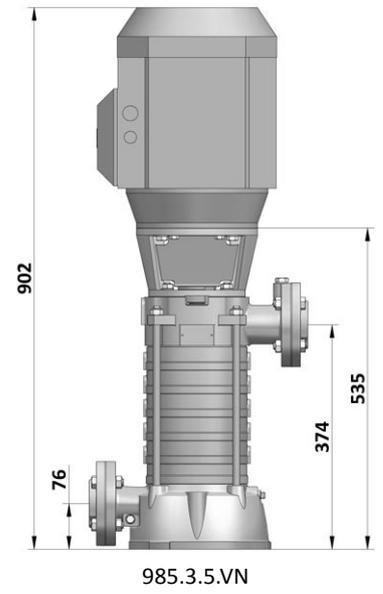
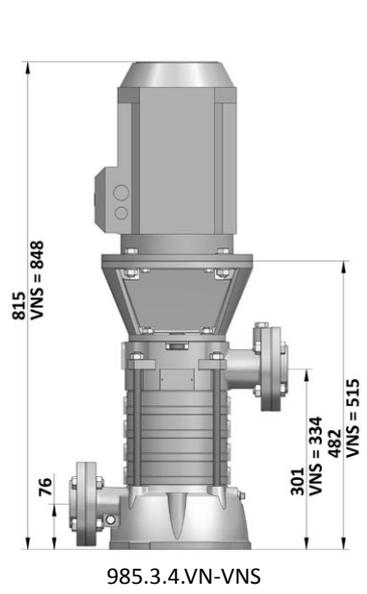
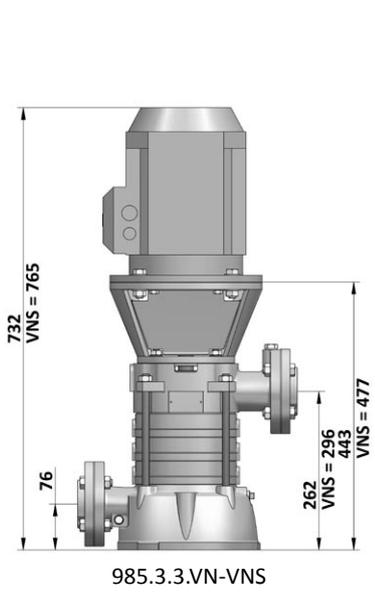
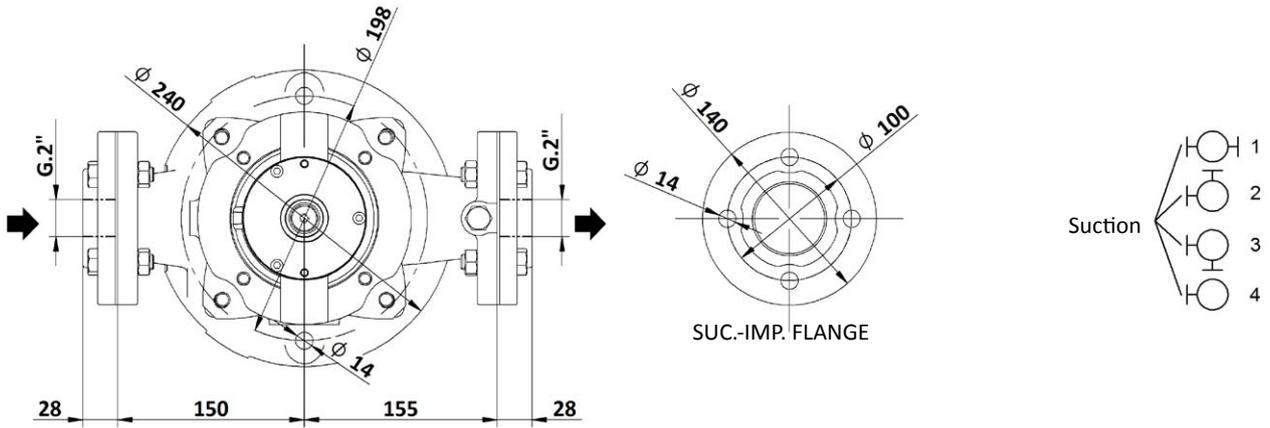
Inspection or replacement of the mechanical seal without disassembling the pump from the installation



MULTIBARS 985 2,850 rpm

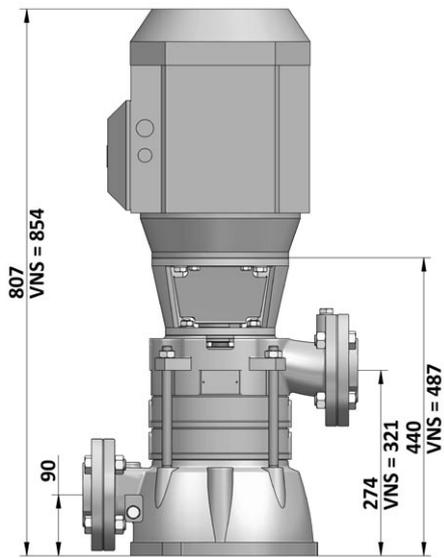
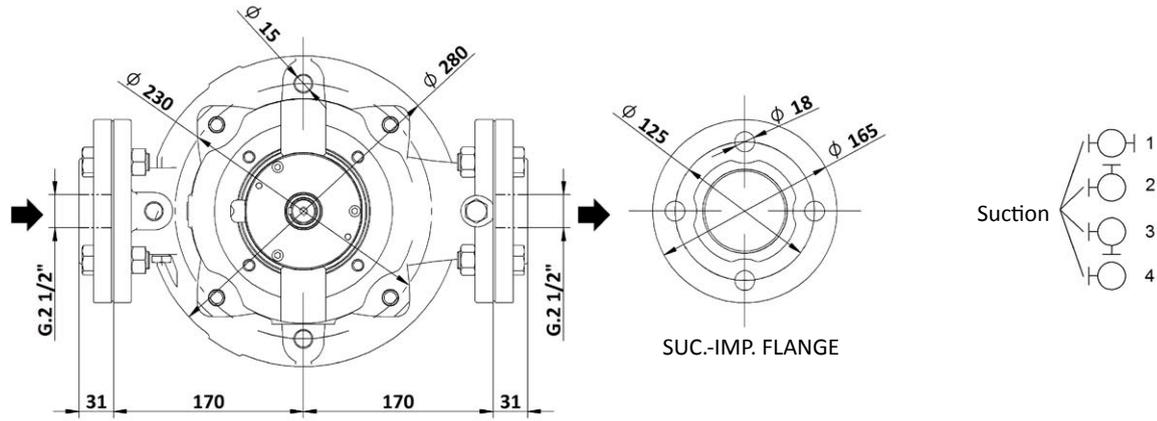


MULTIBARS 985.3 - 985.4 2,850 rpm


MULTIBARS 985.3.VN-VNS dimensions


985.3.VN: discharge port in the same position as 985.3.V

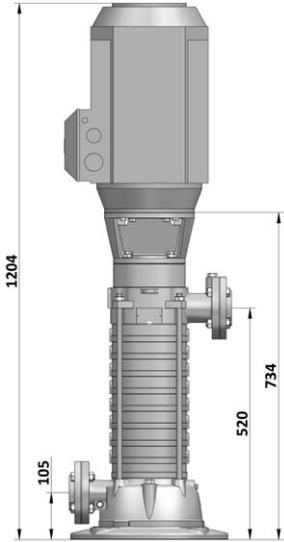
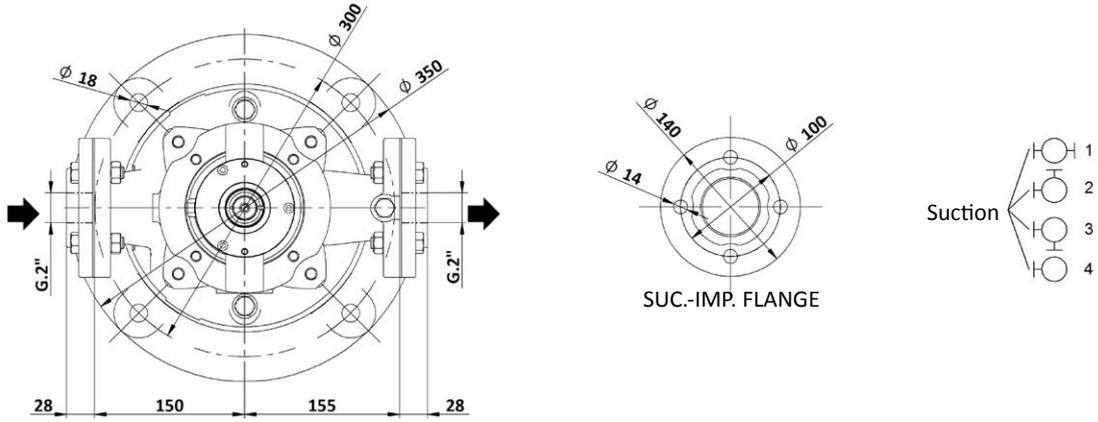
“VNS” = Pumps with the same discharge port position as 985.SV
For substitutions without changing installation

MULTIBARS 985.4.VN - VNS dimensions


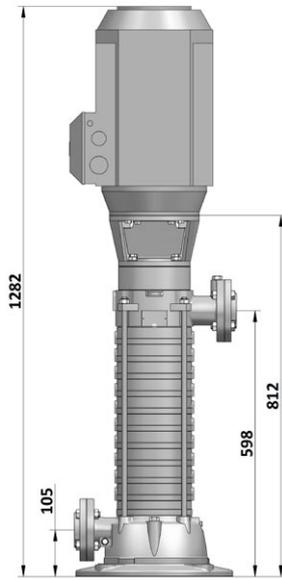
985.4.2.VN-VNS

985.4.VN: discharge port in the same position as 985.4.V

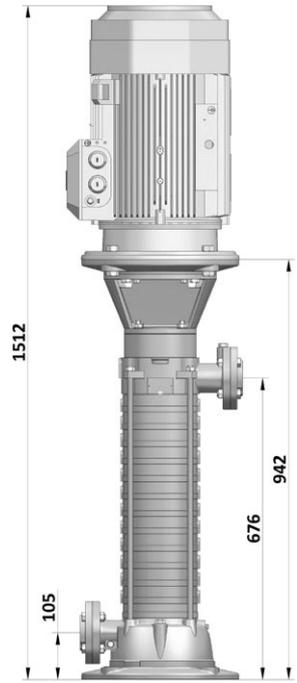
“VNS” = Pumps with the same discharge port position as 985.SV
For substitutions without changing installation

MULTIBARS 985.3.SVN dimensions


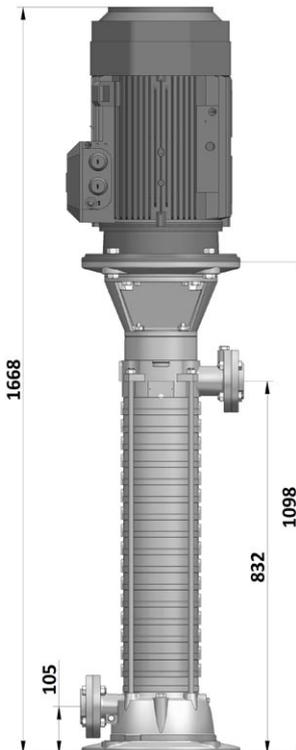
985.3.8.SVN



985.3.10.SVN



985.3.12.SVN



985.3.16.SVN

MULTIBARS 985.4.SVN dimensions
